



The RuggedSwitch® RSG2100 is an industrially hardened, fully managed, modular Ethernet switch, specifically designed to operate reliably in electrically harsh and climatically demanding utility substation and industrial environments. The RSG2100's superior RuggedRated™ hardware design coupled with the embedded Rugged Operating System (ROS®) provides improved system reliability and advanced cyber security and networking features making it ideally suited for creating secure Ethernet networks for mission-critical, real-time control applications.

The RSG2100's modular flexibility offers 10BaseFL/100BaseFX/1000BaseX fiber and 10/100/1000BaseTX and micro-D copper port combinations. Optional front or rear mount connectors make the RSG2100 highly versatile for any application and can support multiple fiber connectors (ST, MTRJ, LC, SC, Micro-D) without loss of port density. The RSG2100 is packaged in a rugged galvanized steel enclosure with industrial grade DIN, panel, or 19" rack-mount mounting options.

## Features and Benefits

### Ethernet Ports

- Up to 3-Gigabit Ethernet ports - copper and/or fiber
- Up to 16-Fast Ethernet ports - copper and/or fiber
- 2 port modules for tremendous flexibility
- Non-blocking, store and forward switching
- Supports many types of fiber (Multimode, singlemode, bi-directional single strand)
- Long haul optics allow Gigabit distances up to 70km
- Multiple connector types (ST, MTRJ, LC, SC, RJ45, micro-D)

### Cyber Security Features

- Multi-level user passwords
- SSH/SSL (128-bit encryption)
- Enable/disable ports, MAC based port security
- Port based network access control (802.1X)
- VLAN (802.1Q) to segregate and secure network traffic
- RADIUS centralized password management
- SNMPv3 authentication and 56-bit encryption

### RuggedRated™ for Reliability in Harsh Environments

- Zero-Packet-Loss™ Technology
- Meets IEEE 1613 (electric utility substations) Class 1 with copper ports or Class 2 with all fiber ports
- Exceeds IEC 61850-3 (electric utility substations)
- Exceeds IEC 61800-3 (variable speed drive systems)
- Exceeds IEC 61000-6-2 (generic industrial)
- Exceeds NEMA TS-2 (traffic control equipment)
- Exceeds EN 50121-4 (railway applications)
- Exceeds EN 50155 (equipment on-board rolling stock)
- -40°C to +85°C operating temperature (no fans)
- Conformal coated printed circuit boards (optional)
- 18 AWG galvanized steel body
- Hazardous Location Certification: Class 1 Division 2

### Rugged Operating System (ROS®) Features

- Simple plug and play operation - automatic learning, negotiation, and crossover detection
- MSTP 802.1Q-2005 (formerly 802.1s)
- RSTP (802.1W) and Enhanced Rapid Spanning Tree (eRSTP™) network fault recovery (<5ms)
- Quality of Service (802.1P) for real-time traffic
- VLAN (802.1Q) with double tagging and GVRP support
- Link aggregation (802.3ad)
- IGMP Snooping for multicast filtering
- Port Rate Limiting and Broadcast Storm Limiting
- Port configuration, status, statistics, mirroring, security
- SNTP time synchronization (client and server)
- Industrial automation features (e.g. Modbus)

### Management Tools

- Web-based, Telnet, CLI management interfaces
- SNMP v1/v2/v3
- Remote monitoring (RMON)
- Rich set of diagnostics with logging and alarms

### Universal Power Supply Options


- Fully integrated, redundant (optional) power supplies
- Universal high voltage range: 88-300VDC or 85-264VAC
- Low voltage ranges: 24VDC(10-36VDC), 48VDC (36-72VDC)
- Screw or pluggable terminal blocks
- CSA/UL 60950 safety approved to +85°C



**Modularity:**

- ▶ 10 available slots
- ▶ Up to 16 Fast Ethernet ports & 3 Gigabit ports
- ▶ Dual and single port modules

**RuggedSwitch® RSG2100**

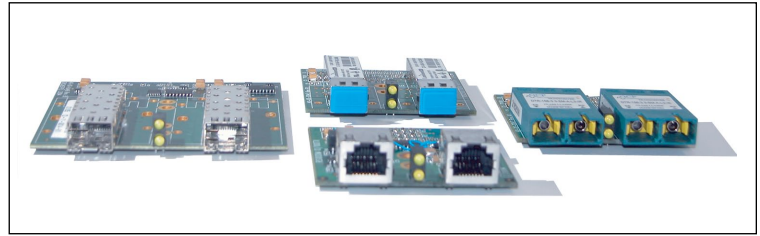

**Mounting Options**

- ▶ Panel/Din Rail
- ▶ 19" Rack Mount
- ▶ Front or Rear Mount

**Fast Ethernet Ports Types:**

- ▶ Up to 16 Fast Ethernet Ports
- ▶ Virtually any mix of fiber or copper desired
- ▶ 10/100TX RJ45 & micro-D
- ▶ 10FL Multimode fiber
- ▶ 100FX Multimode fiber
- ▶ 100FX Singlemode fiber

**Gigabit Port Types:**

- ▶ Up to 3 Gigabit Ethernet ports
- ▶ 10/100/1000 TX RJ45 or micro-D
- ▶ 1000SX Multimode fiber
- ▶ 1000LX Singlemode fiber
- ▶ Pluggable optics (SFP and GBIC), SC, and LC

**Modular HMI:**

- ▶ Front or rear mount

**Integrated Power Supply**

- ▶ Universal high-voltage range: 88-300VDC or 85-264VAC
- ▶ Popular low voltage DC ranges: 24VDC (10-36VDC), 48VDC (36-59VDC)
- ▶ True Dual Redundant Parallel Load Sharing (Optional)
- ▶ Screw or pluggable terminal blocks available

**Operating Temperature**

- ▶ -40°C to +85°C
- ▶ No Fans

**Critical Alarm Relay**

- ▶ Form-C contact ratings:  
Max Voltage 250VAC, 125VDC  
Max Current 2A@250VAC, 0.15A@125VDC, 2A@30VDC



## ROS® Features



### Cyber Security

Cyber security is an urgent issue in many industries where advanced automation and communications networks play a crucial role in mission critical applications and where high reliability is of paramount importance. Key ROS® features that address security issues at the local area network level include:

- **Passwords** - Multi-level user passwords secures switch against unauthorized configuration
- **SSH/SSL** - Extends capability of password protection to add encryption of passwords and data as they cross the network
- **Enable/Disable Ports** - Capability to disable ports so that traffic can not pass
- **802.1Q VLAN** - Provides the ability to logically segregate traffic between predefined ports on switches
- **MAC Based Port Security** - The ability to secure ports on a switch so only specific Devices / MAC addresses can communicate via that port
- **802.1X Port Based Network Access Control** - The ability to lock down ports on a switch so that only authorized clients can communicate via this port
- **RADIUS** - authentication service using MD5 hash and providing centralized password management
- **SNMPv3** - encrypted authentication access security and data encryption (CBC-DES with 56-bit encryption key)
- **Secure Socket Layer** - Web-based management using SSL with data encryption (128-bit encryption key)
- **RSA** - 1024 bit key for key management and key exchange
- **TACACS+** - Terminal Access Control and Accounting Services Client provides encrypted authentication and authorization
- **Point to Point (PPP)** - using CHAP (MD5 Hash) authentication service
- **SFTP** - Secure File Transfer Protocol using SSH encryption

The ROS® cyber security features are included to help address the various industry specific security standards such as NERC CIP, ISA S99, AGA 12, IEC 62443, ISO 17799:2005 and PCSRF SPP-ICS.

### Enhanced Rapid Spanning Tree Protocol (eRSTP™)

RuggedCom eRSTP™ allows the creation of fault-tolerant ring and mesh Ethernet networks that incorporate redundant links that are 'pruned' to prevent loops. eRSTP™ yields worst-case fault recovery of 5ms times the 'bridge diameter' and allows rings of up to 160 switches. For example, a ring of ten switches will have fault recovery times under 50ms. eRSTP™ implements both STP and RSTP to ensure interoperability with commercial switches unlike other proprietary 'ring' solutions.

Note: eRSTP™ fault recovery times may be approximated as follows:

For 100 Mbps, fault recovery performance is <5ms/hop  
For 1,000 Mbps, fault recovery performance is <5ms/hop + 20ms

### Quality of Service (IEEE 802.1p)

Some networking applications such as real-time control or VoIP

(voice over IP) require predictable arrival times for Ethernet frames. Switches can introduce latency in times of heavy network traffic due to the internal queues that buffer frames and then transmit on a first come first serve basis. ROS® supports 'Class of Service' in accordance with IEEE 802.1p that allows time critical traffic to jump ahead to the front of the queue thus minimizing latency and reducing jitter to allow such demanding applications to operate correctly. ROS® allows priority classification by port, tags, MAC address, and IP type of service (ToS). A configurable "weighted fair queuing" algorithm controls how frames are emptied from the queues.

### VLAN (IEEE 802.1Q)

Virtual local area networks (VLAN) allow the segregation of a physical network into separate logical networks with independent broadcast domains. A measure of security is provided since hosts can only access other hosts on the same VLAN and traffic storms are isolated. ROS® supports 802.1Q tagged Ethernet frames and VLAN trunks. Port based classification allows legacy devices to be assigned to the correct VLAN. GVRP support is also provided to simplify the configuration of the switches on the VLAN.

### Link Aggregation (802.3ad)

The link aggregation feature provides the ability to aggregate several Ethernet ports into one logical link (port trunk) with higher bandwidth. This provides an inexpensive way to set up a high speed backbone to improve network bandwidth. This feature is also known as "port trunking", "port bundling", "port teaming", and "Ethernet trunk".

### IGMP Snooping

ROS® uses IGMP snooping (Internet Group Management Protocol v1&v2) to intelligently forward or filter multicast traffic streams (e.g. MPEG video) to or from hosts on the network. This reduces the load on network trunks and prevents packets from being received on hosts that are not involved. ROS® has a very powerful implementation of IGMP snooping that:

- Can be enabled on a per VLAN basis.
- Detects and filters all multicast streams regardless of whether subscribers exist.
- Supports "router-less" operation by supporting an "active" mode.
- Restores traffic streams immediately after an RSTP topology change.

### SNMP (Simple Network Management Protocol)

SNMP provides a standardized method for network management stations the ability to interrogate devices from different vendors. SNMP versions supported by ROS® are v1, v2c, and v3. SNMPv3 in particular provides security features such as authentication, privacy with data encryption (CBC-DES with 56-bit encryption key) and access control not present in earlier SNMP versions. ROS® also supports numerous standard MIBs (Management Information Base) allowing for easy integration with any network management system (NMS).

## ROS® Features



### SNMP (Simple Network Management Protocol) (cont'd)

A feature of SNMP supported by ROS® is the ability to generate “traps” upon system events. RuggedNMS™, the RuggedCom management solution, can record traps from multiple devices providing a powerful network troubleshooting tool. It also provides a graphical visualization of the network and is fully integrated with all RuggedCom products.

### SNTP (Simple Network Time Protocol)

SNTP automatically synchronizes the internal clock of all ROS® devices on the network. This allows for correlation of time stamped events for troubleshooting.

### SCADA and Industrial Automation

ROS® contains features that optimize network performance and simplify switch management based on the unique requirements found in SCADA and industrial automation applications. Features such as Modbus TCP management for retrieval of switch data using the ubiquitous Modbus protocol and DHCP Option 82, a Rockwell Automation ODVA requirement for IP address assignment based on the location of the end device, provide capabilities not found in typical “commercial” or “office grade” Ethernet switches.

### Port Based Network Access Control (802.1X)

ROS® supports the IEEE 802.1X standard that defines a mechanism for port-based network access control which provides a means of authenticating and authorizing devices attached to LAN ports.

### Port Rate Limiting

ROS® supports configurable rate limiting per port to limit unicast and multicast traffic. This can be essential to managing precious network bandwidth for service providers. It also provides edge security for denial of service (DoS) attacks.

### Broadcast Storm Filtering

Broadcast storms wreak havoc on a network and can cause attached devices to malfunction. This could be disastrous on a network with mission critical equipment. ROS® limits this by filtering broadcast frames with a user-defined threshold.

### Loss of Link Management

Some intelligent electronic devices (IEDs) have dual fiber optic ports with automatic failover to a backup port should the primary fail. ROS® ensures this mechanism works reliably under all failure modes by appropriately disabling link signals when required. ROS® also flushes learned MAC addresses to ensure the failover occurs quickly.

### Port Mirroring

ROS® can be configured to duplicate all traffic on one port to a designated mirror port. When combined with a network analyzer, this can be a powerful troubleshooting tool.

### Port Configuration and Status

ROS® allows individual ports to be ‘hard’ configured for speed, duplex, auto-negotiation, flow control and more. This allows proper connection with devices that do not negotiate or have unusual settings. Detailed status of ports with alarm and SNMP trap on link problems aid greatly in system troubleshooting.

### Port Statistics and RMON (Remote Monitoring)

ROS® provides continuously updating statistics per port that provide both ingress and egress packet and byte counters as well as detailed error figures. Also provided is full support for the RMON statistics, history, alarms, and event groups. RMON allows for very sophisticated data collection, analysis and detection of traffic patterns.

### Event Logging and Alarms

ROS® records all significant events to a non-volatile system log allowing forensic troubleshooting. Events include link failure and recovery, unauthorized access, broadcast storm detection, and self-test diagnostics among others. Alarms provide a snapshot of recent events that have yet to be acknowledged by the network administrator. An external hardware relay is de-energized during the presence of critical alarms allowing an external controller to react if desired.

### HTML Web Browser and Telnet User Interfaces

ROS® provides a simple, intuitive user interface for configuration and monitoring via a standard graphical web browser or via Telnet. All system parameters include detailed on-line help to make setup a breeze. ROS®, presents a common look and feel and standardized configuration process allowing easy migration to other RuggedCom managed products.

### Configuration via ASCII Text File

All configuration parameters are stored in an ASCII formatted text file that can easily be transferred via TFTP or Xmodem. The configuration file can be saved for backup purposes and easily manipulated by a text editor. The same text file can be downloaded to the switch at a later date in order to re-configure or restore a previous configuration.

### Command Line Interface (CLI)

A command line interface can be used in conjunction with remote shell to automate data retrieval, configuration updates, and firmware upgrades. A powerful SQL-like capability allows expert users the ability to selectively retrieve or manipulate any parameters the device has to offer.

# EMI and Environmental Type Tests

IEC 61850-3 EMI TYPE TESTS				
TEST	Description		Test Levels	Severity Levels
IEC 61000-4-2	ESD	Enclosure Contact	+/- 8kV	4
		Enclosure Air	+/- 15kV	4
IEC 61000-4-3	Radiated RFI	Enclosure ports	20 V/m	Note 1
IEC 61000-4-4	Burst (Fast Transient)	Signal ports	+/- 4kV @ 2.5kHz	Note 1
		D.C. Power ports	+/- 4kV	4
		A.C. Power ports	+/- 4kV	4
		Earth ground ports	+/- 4kV	4
IEC 61000-4-5	Surge	Signal ports	+/- 4kV line-to-earth, +/- 2kV line-to-line	4
		D.C. Power ports	+/- 2kV line-to-earth, +/- 1kV line-to-line	3
		A.C. Power ports	+/- 4kV line-to-earth, +/- 2kV line-to-line	4
IEC 61000-4-6	Induced (Conducted) RFI	Signal ports	10V	3
		D.C Power ports	10V	3
		A.C. Power ports	10V	3
		Earth ground ports	10V	3
IEC 61000-4-8	8 Magnetic Field	Enclosure ports	40 A/m continuous, 1000 A/m for 1 s 1000 A/m for 1 s	Note 1 5
IEC 61000-4-29	Voltage Dips & Interrupts	D.C. Power ports	30% for 0.1s, 60% for 0.1s, 100% for 0.05s	N/A
IEC 61000-4-11		A.C. Power ports	30% for 1 period, 60% for 50 periods 100% for 5 periods, 100% for 50 periods	N/A
IEC 61000-4-12	Damped Oscillatory	Signal ports	2.5kV common, 1kV diff. mode@1MHz	3
		D.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	3
		A.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	3
IEC 61000-4-16	Mains Frequency Voltage	Signal ports	30V Continuous, 300V for 1s	4
		D.C. Power ports	30V Continuous, 300V for 1s	4
IEC 61000-4-17	Ripple on D.C. Power Supply	D.C. Power ports	10%	3
IEC 60255-5	Dielectric Strength	Signal ports	2kVac (Fail-Safe Relay output)	N/A
		D.C. Power ports	1.5kV DC	N/A
		A.C. Power ports	2kVac	N/A
IEC 60255-5	H.V. Impulse	Signal ports	5kV (Fail-Safe Relay output)	N/A
		D.C. Power ports	5kV	N/A
		A.C. Power ports	5kV	N/A

IEEE 1613 (C37.90.x) EMI IMMUNITY TYPE TESTS <sup>2</sup>				
Test	Description		Test Levels	
IEEE C37.90.3	ESD	Enclosure Contact	+/-2kV, +/-4kV, +/- 8kV	
		Enclosure Air	+/-4kV, +/-8kV, +/-15kV	
IEEE C37.90.2	Radiated RFI	Enclosure ports	35 V/m	
IEEE C37.90.1	Fast Transient	Signal ports	+/- 4kV @ 2.5kHz	
		D.C. Power ports	+/- 4kV	
		A.C. Power ports	+/- 4kV	
		Earth ground ports <sup>3</sup>	+/- 4kV	
IEEE C37.90.1	Oscillatory	Signal ports	2.5kV common mode @1MHz	
		D.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	
		A.C. Power ports	2.5kV common, 1kV diff. mode@1MHz	
IEEE C37.90	H.V. Impulse	Signal ports	5kV (Fail-Safe Relay output)	
		D.C. Power ports	5kV	
		A.C. Power ports	5kV	
IEEE C37.90	Dielectric Strength	Signal ports	2kVac	
		D.C. Power ports	1.5kV DC	
		A.C. Power ports	2kVac	

Environmental Type Tests				
Test	Description		Test Levels	
IEC 60068-2-1	Cold Temperature	Test Ad	-40°C, 16 Hours	
IEC 60068-2-2	Dry Heat	Test Bd	+85°C, 16 Hours	
IEC 60068-2-30	Humidity (Damp Heat, Cyclic)	Test Db	95% (non-condensing), 55°C , 6 cycles	
IEC 60255-21-1	Vibration		2g @ (10 - 150) Hz	
IEC 60255-21-2	Shock		30g @ 11mS	

## Technical Specifications

### Power Supply

- Power Consumption: 28W Max
- 24VDC: 10-36 VDC, 1.2A
- 48VDC: 36-72 VDC, 0.6A
- HI Voltage AC/DC: 88-300VDC or 85-264VAC

### Critical Alarm Relay

- Form-C contact ratings:
- Max Voltage 250VAC, 125VDC
- Max Current 2A@250VAC, 0.15A @125VDC,
- 2A@30VDC

### Physical

- Height: 4.42cm / 1.74" (1U)
- Width: 46.48cm / 18.3" (fits 19" rack mount)
- Depth: 31.5cm / 12.4"
- Weight: 5.2kg / 11.5 lbs
- Ingress Protection: IP40 (1mm objects)
- Enclosure: 18 AWG galvanized steel
- Mounting: 19" rack, DIN rail or panel mounted

### Switch Properties

- Switching method: Store & Forward
- Switching latency: 7 us
- Switching bandwidth: 9.2 Gbps
- MAC addresses: 8192
- MAC address table size: 64kbytes
- Priority Queues: 4
- Frame buffer memory: 2 Mbit
- Simultaneous VLANs: 255
- VLAN ID Range: 1 to 4094
- IGMP multicast groups: 256
- Port rate limiting
- No head of line blocking

### Approvals

- ISO: Designed and manufactured using a ISO9001: 2000 certified quality program
- CE Marking
- Emissions: FCC Part 15 (Class A), EN55022 (CISPR22 Class A)
- Safety: cCSAus (Compliant with CSA C22.2 No. 60950, UL 60950, EN60950)
- Laser Eye Safety (FDA/CDRH): Complies with 21 CFR Chapter1, Subchapter J.
- Hazardous Locations: Class 1 Division 2

### Network Management

- HTTP graphical web-based, SSL (128-bit encryption)
- SNMP v1, v2c, v3 (56-bit encryption)
- Telnet, VT100, SSH/SFTP (128-bit encryption)
- Command Line Interface (CLI)
- RSA Key Management (1024 bit key)
- Authentication and Accounting - TACACS+ (encrypted), RADIUS client, PPP

### Warranty

- 5 Years - Applicable to design and manufacturing related product defects.

### EMI Immunity and Environmental Compliance

- IEC 61000-6-2 Industrial (Generic)
- IEC 61800-3 Industrial (Variable Speed Drive Systems)
- IEC 61850-3 Electric Utility Substations
- IEEE 1613 Electric Utility Substations
- NEMA TS 2 Traffic Control Equipment
- EN 50121-4 (railway applications)
- EN 50155 (equipment on-board rolling stock)

### IEEE Compliance

- 802.3-10BaseT
- 802.3u-100BaseTX, 100BaseFX
- 802.3x-Flow Control
- 802.3z-1000BaseLX
- 802.3ab-1000BaseTX
- 802.3ad-Link Aggregation
- 802.1D-MAC Bridges
- 802.1D-Spanning Tree Protocol
- 802.1p-Class of Service
- 802.1Q-VLAN Tagging
- 802.1w-Rapid Spanning Tree Protocol
- 802.1X-Port Based Network Access Control
- 802.1Q-2005 (formerly 802.1s) MSTP


### IETF RFC Compliance

- RFC768-UDP
- RFC783-TFTP
- RFC791-IP
- RFC792-ICMP
- RFC793-TCP
- RFC826-ARP
- RFC854-Telnet
- RFC894-IP over Ethernet
- RFC1112-IGMP v1
- RFC1519-CIDR
- RFC1541-DHCP (client)
- RFC2030-SNTP
- RFC2068-HTTP
- RFC2236-IGMP v2
- RFC2284-EAP
- RFC2475-Differentiated Services
- RFC2865-RADIUS
- RFC3414-SNMPv3-USM
- RFC3415-SNMPv3-VACM




### IETF SNMP MIBS

- RFC1493-BRIDGE-MIB
- RFC1907-SNMPv2-MIB
- RFC2012-TCP-MIB
- RFC2013-UDP-MIB
- RFC2578-SNMPv2-SMI
- RFC2579-SNMPv2-TC
- RFC2819-RMON-MIB
- RFC2863-IF-MIB
- Draft-ietf-bridge-rstpmib-03-BRIDGE-MIB
- Draft-ietf-bridge-bridgemib-smiv2-03-RSTP-MIB
- IANAifType-MIB

**Dimensions**

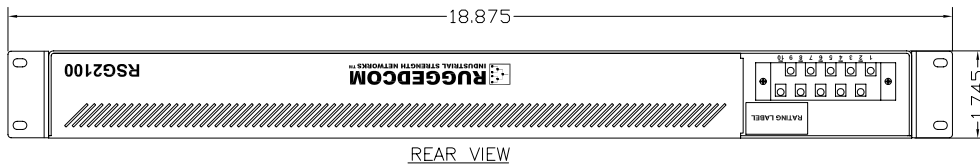

RACK MOUNT BRACKETS  
FRONT OR REAR. BRACKETS CAN  
ALSO BE MOVED BACK UP TO ONE INCH.

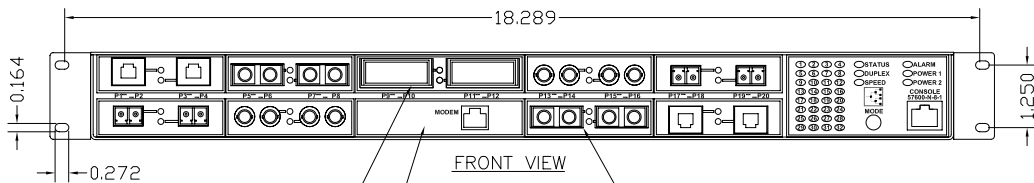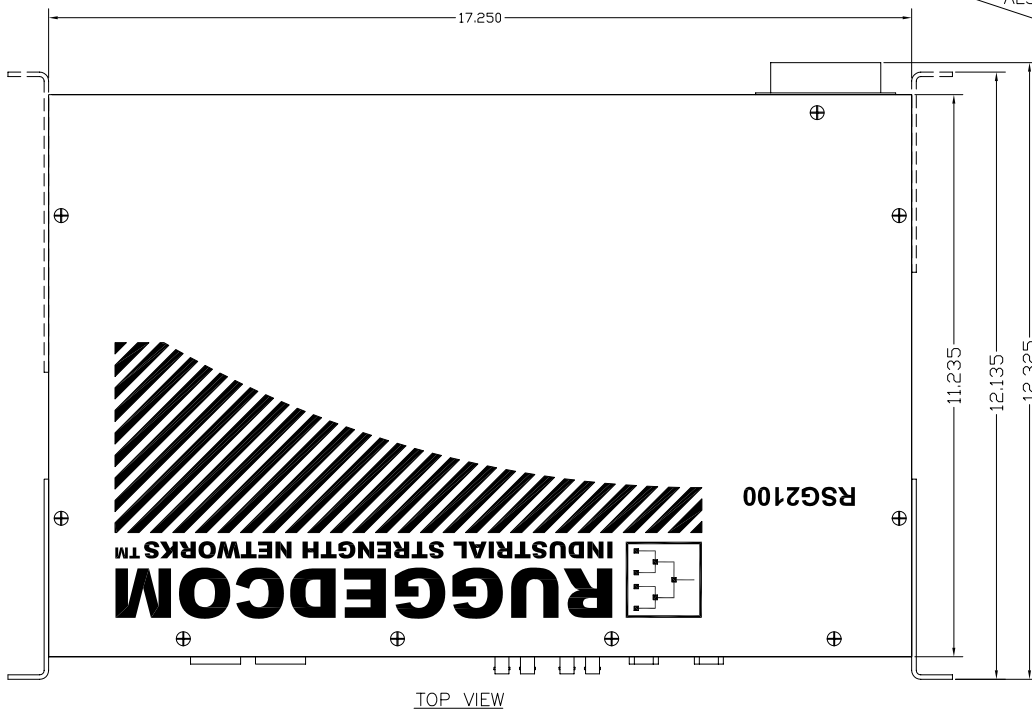


EXPANSION MODULE  
GIGABIT CONNECTORS  
2 PORTS X 1 OF ANY CONNECTOR TYPE  
CONFIGURABLE MODULES  
2 PORTS X 8 OF ANY CONNECTOR TYPE

PRELIMINARY

## Mounting Options

### 19" Rack Front Mount - (Connectors At Front) 12-11-0001-F




FRONT VIEW




REAR VIEW


### 19" Rack Rear Mount - (Connectors At Rear) 12-11-0001-R




FRONT VIEW



REAR VIEW



### Panel / DIN Rail Bottom Mount - (Connectors At Bottom) 12-11-0001-B

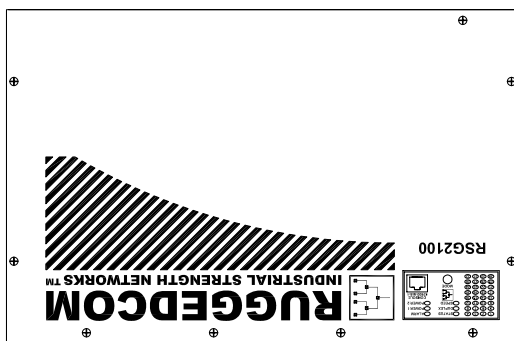


FRONT VIEW




BOTTOM VIEW

### Panel / DIN Rail Top Mount - (Connectors At Top) 12-11-0001-T



TOP VIEW

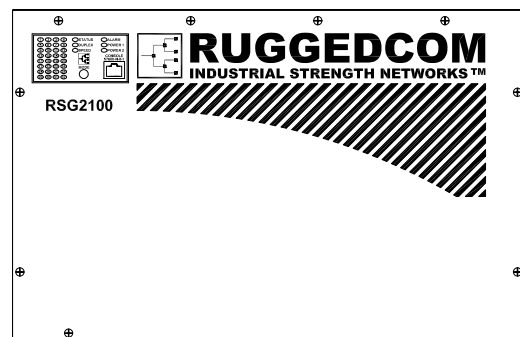

FRONT VIEW

PRELIMINARY

## Order Codes

**RSG2100** - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
 Main Mount PS1 PS2 S1 S2 S3 S4 S5 S6 S7 S8 S9 S10 MOD

Slot 1	Slot 3	Slot 5	Slot 7	Slot 9	RSG2100P
Slot 2	Slot 4	Slot 6	Slot 8	Slot 10	

### Main: Ethernet and Power Connectors

- R = Ethernet on rear; LED panel on front; power connector on rear
- F = Ethernet on front; LED panel on front; power connector on rear
- B = Ethernet on rear; LED panel on top; power connector on rear
- T = Ethernet on front; LED panel on top; power connector on rear

### Mount: Mounting Options

- RM = 19" Rack Mount Kit
- DP = DIN and Panel Mount Kit
- RD = 19" Rack, DIN, and Panel Mount Kit
- 00 = No Mounting Option

### PS1 and PS2: Power Supply 1 and 2<sup>(5)</sup>

- 24 = 24VDC (10-36VDC), screw terminal block
- 48 = 48VDC (36-72VDC), screw terminal block
- HI = 88-300VDC or 85-264VAC, screw terminal block
- 24P = 24VDC (10-36VDC), pluggable terminal block
- 48P = 48VDC (36-72VDC), pluggable terminal block
- HIP = 88-300VDC or 85-264VAC, pluggable terminal block
- XX = No Power Supply (PS2 Only)

### S1, S2, S3, S4, S7, S8, S9 and S10:

#### Ethernet Modules for Slots 1, 2, 3, 4, 7, 8, 9 and 10

- XXXX = Empty
- TX01 = 2 x 10/100TX RJ45
- TX02 = 2 x 10/100TX micro-D
- FL01 = 2 x 10FL - Multimode, 850nm, ST
- FX01 = 2 x 100FX - Multimode, 1300nm, ST
- FX02 = 2 x 100FX - Multimode, 1300nm, SC
- FX11 = 2 x 100FX - Multimode, 1300nm, LC
- FX03 = 2 x 100FX - Multimode, 1300nm, MTRJ
- FX04 = 2 x 100FX - Singlemode, 1310nm, ST, 20km
- FX05 = 2 x 100FX - Singlemode, 1310nm, SC, 20km
- FX06 = 2 x 100FX - Singlemode, 1310nm, LC, 20km
- FX07 = 2 x 100FX - Singlemode, 1310nm, SC, 50km
- FX08 = 2 x 100FX - Singlemode, 1310nm, LC, 50km
- FX09 = 2 x 100FX - Singlemode, 1310nm, SC, 90km
- FX10 = 2 x 100FX - Singlemode, 1310nm, LC, 90km

### S5: Gigabit Ethernet Modules for slot 5

- XXXX = Empty
- CG01 = 2 x 10/100/1000Tx RJ45
- CG02 = 2 x 10/100/1000TX micro-D
- FG01 = 2 x 1000SX - Multimode, 850nm, LC, 500m
- FG02 = 2 x 1000LX - Singlemode, 1310nm, SC connectors, 10km
- FG03 = 2 x 1000LX - Singlemode, 1310nm, LC connectors, 10km
- FG04 = 2 x 1000LX - Singlemode, 1310nm, SC connectors, 25km
- FG05 = 2 x 1000LX - Singlemode, 1310nm, LC connectors, 25km

- FG50 = 2 x 1000LX SFP - Blank (no optical transceiver)
- FG51 = 2 x 1000SX SFP - Multimode, 850nm, LC, 500m<sup>(3)</sup>
- FG52 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 10km<sup>(3)</sup>
- FG53 = 2 x 1000LX SFP - Singlemode, 1310nm, LC, 25km<sup>(3)</sup>
- FG54 = 2 x 1000LX SFP - Singlemode, 1550nm, LC, 70km<sup>(2)(3)</sup>
- FG70 = 2 x 1000LX GBIC - Blank (no optical transceiver)
- FG71 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 10km<sup>(4)</sup>
- FG72 = 2 x 1000LX GBIC - Singlemode, 1310nm, SC, 25km<sup>(4)</sup>
- FG73 = 2 x 1000LX GBIC - Singlemode, 1550nm, SC, 70km<sup>(2)(4)</sup>

### S6: Gigabit Ethernet Modules for slot 6

- XXXXX = Empty
- 1CG01 = 1 x 10/100/1000Tx RJ45
- 1CG02 = 1 x 10/100/1000TX micro-D
- 1FG01 = 1 x 1000SX - Multimode, 850nm, LC, 500m
- 1FG02 = 1 x 1000LX - Singlemode, 1310nm, SC connectors, 10km
- 1FG03 = 1 x 1000LX - Singlemode, 1310nm, LC connectors, 10km
- 1FG04 = 1 x 1000LX - Singlemode, 1310nm, SC connectors, 25km
- 1FG05 = 1 x 1000LX - Singlemode, 1310nm, LC connectors, 25km
- 1FG50 = 1 x 1000SX SFP - Blank (no optical transceiver)
- 1FG51 = 1 x 1000SX SFP - Multimode, 850nm, LC, 500m<sup>(3)</sup>
- 1FG52 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 10km<sup>(3)</sup>
- 1FG53 = 1 x 1000LX SFP - Singlemode, 1310nm, LC, 25km<sup>(3)</sup>
- 1FG54 = 1 x 1000LX SFP - Singlemode, 1550nm, LC, 70km<sup>(2)(3)</sup>
- 1FG70 = 1 x 1000LX GBIC - Blank (no optical transceiver)
- 1FG71 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 10km<sup>(4)</sup>
- 1FG72 = 1 x 1000LX GBIC - Singlemode, 1310nm, SC, 25km<sup>(4)</sup>
- 1FG73 = 1 x 1000LX GBIC - Singlemode, 1550nm, SC, 70km<sup>(2)(4)</sup>

### MOD: Manufacturing Modifications

- XX = None
- C01 = Conformal Coating

#### Notes:

1 Distance ratings are typical but will depend on type of cabling, number of connectors and splices.

2 These transceivers have an operating temperature range of -20 °C to +85 °C.  
 All other transceivers have an operating temperature range of -40 °C to +85 °C

3 SFP pluggable optics that consist of a blank cage (FG50 for dual, 1FG50 for single) plus specified fiber optic interface(s) installed

4 GBIC pluggable optics that consist of a blank cage (FG70 for dual, 1FG70 for single) plus specified fiber optic interface(s) installed

5 PS1 and PS2 must be both either pluggable or screw terminal block

**Example Order Codes:**

---

**RSG2100-R-RM-24-48-TX01-TX01-XXXX-XXXX-XXXX-XXXX-XXXX-XXXX-XXXX-XXXX-XX**

19" Rack mounted, 24VDC power supply, 48VDC power supply, 4 10/100 RJ45 Ethernet Ports, with Ethernet ports on the rear.

**RSG2100-F-RM-48-48-TX01-TX01-FX01-FX01-XXXX-XXXX-XXXX-XXXX-XXXX-XX**

19" Rack mounted, 48VDC power supply, 48VDC, 4 10/100 RJ45 Ethernet Ports, 4 100FX (Multi Mode 1300nm Fiber) Ethernet ports, with Ethernet ports on the front.

**RSG2100-R-RM-HI-HI-TX01-TX01-FX01-FX01-FG02-XXXX-XXXX-FX01-FX01-FX01-FX01-C01**

19" Rack mounted, HI power supply, HI power supply, 4 10/100 RJ45 Ethernet Ports, 12 100FX (Multi Mode 1300nm Fiber) Ethernet ports, 2 1000LX (Gigabit) Ethernet ports, with Ethernet ports on the front, conformal coating.

**RSG2100-R-RM-HI-HI-TX02-TX02-XXXX-XXXX-CG02-XXXX-XXXX-FX01-FX01-FX01-FX01-C01**

19" Rack mounted, HI power supply, HI power supply, 4 10/100, micro-D Ethernet Ports, 2 1000LX (Gigabit) LC Ethernet ports, with Ethernet ports on the front, conformal coating.

**Accessories/Options**

41-11-0011 - Cable support bracket (one)

43-10-0007 - North America three prong connector power cable

**RuggedCom Inc.**

300 Applewood Crescent, Unit 1,  
Concord, Ontario, Canada L4K 5C7

**Tel:** +1 (905) 856-5288 **Fax:** +1 (905) 856-1995

**Toll Free:** 1 (888) 264-0006

**Technical Support Center**

**Toll Free (USA & Canada):** 1 (866) 922-7975

**International:** +1 (905) 856-5288

**USA:** +1 (954) 922-7975

**E-mail:** Support@RuggedCom.com

© 2011 RuggedCom Inc.

RuggedSwitch is a registered trademark of RuggedCom Inc.

Ethernet is a trademark of the Xerox Corporation.

Patent Pending

All specifications in this document are subject to change without notice.

Rev 3d — 07/29/11

For additional information on our products and services, please  
visit our web site at: [www.RuggedCom.com](http://www.RuggedCom.com)